



Ergonomic Handle

Has neutral setting for easy usage. Handle would return to its original position when being released.



Weighing Scale

Measure the loads being carried to obtain accurate reading and to achieve maximum work performance.




With Printer

Optional feature that can be added upon request from the user.



AC Pump

The cast press, one-piece pump highlights a controlled bringing down rate valve to decrease item jostling for longer pump life.




Powder Coated

To maintain material quality and powder coating for extra protection in extreme applications.



Double PU Load Wheels

Single wheels are ideal because they allow for easy turning.

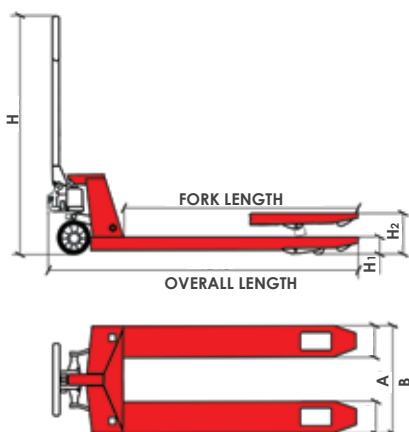

CODE	HPESR20L-SE	HPESR20L-NR
LOADING CAPACITY (KG)	2000	2000
OVERALL DIMENSION (W x L x H)	75 x 692 x 1220 mm	75 x 555 x 1150 mm
FORK HEIGHT LOWERED, RAISED	76, 190 mm	76, 190 mm
FORK WIDTH	182 mm	182 mm
INTERNAL FORK WIDTH	328 mm	328 mm
OVERALL FORK WIDTH	692 mm	692 mm
FORK LENGTH	1220 mm	1150 mm
LOAD WHEEL	80 x 93 mm DOUBLE PU	80 x 93 mm DOUBLE PU
STEERING WHEEL	180 x 50 mm PU	180 x 50 mm PU
FORK TYPE	STANDARD	NARROW