



Hydraulic Pump

The hydraulic pump highlights a controlled bringing down rate valve to decrease item jostling for longer pump life.





PU Load Wheels

PU wheels provide friction between the loads and withstand heavier loads that rubber.

LIFTING STROKE (UNLOADED): 28s

LIFTING STROKE (LOADED): 70s

FORK DIMENSION: 160 x 1170 mm

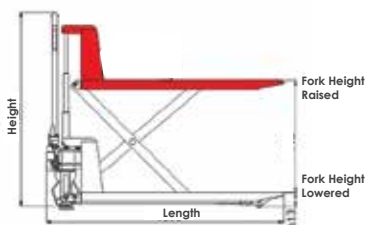

CODE	LOAD CAPACITY	OVERALL DIMENSION (W x L x H)	FORK TYPE	MIN FORK HEIGHT	MAX FORK HEIGHT	WIDTH ACROSS FORKS	FRONT CASTORS	REAR CASTORS	NET WEIGHT
S02-PHL1000N	1000KG	540 x 1170 x 850 mm	NARROW	85 mm	800 mm	540 mm	75 x 50 mm	180 x 50 mm	109KG
S02-PHL1000W	1000KG	685 x 1170 x 850 mm	STANDARD	85 mm	800 mm	680 mm	75 x 50 mm	180 x 50 mm	109KG